


A brown 19gsm polyethylene net with a thin lower melting bonding layer for heat lamination

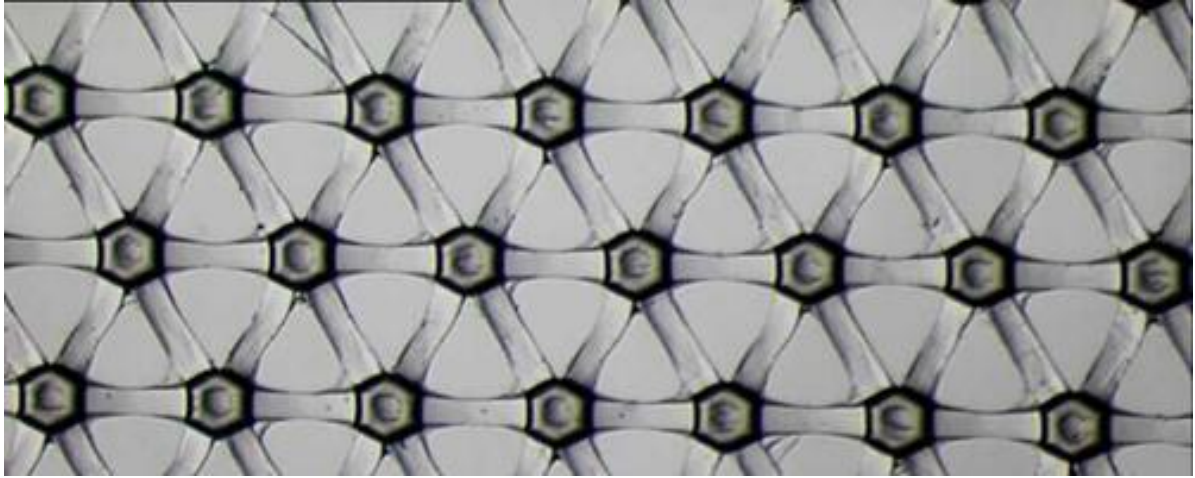

#### Description

- A brown polyethylene net with a thin lower melting bonding layer.

#### Processing

- Co-extruded nets are designed for use in heat lamination processes.

#### Applications

- Woundcare dressings requiring a laminated pad with low adherence characteristics.
- First aid dressings
- General lamination

### Typical Properties

Property	Typical Value
Thickness (micron)	110
Film Weight (g/m <sup>2</sup> )	19
Boss Count (MD) (per 25.4mm)	20
Boss Count (TD) (per 25.4mm)	35
Tensile Strength MD (gf/cm)	700
Tensile Strength TD (gf/cm)	500
Nominal Length (lm)	1650
Min Length (lm)	1000
Minimum Width (mm)	50
Maximum Width (mm)	1200

Product Information correct as of 10th September 2015

#### DelStar Technologies

Broad Lane Gilberdyke East Yorkshire HU15 2TD

<http://extrudedfilmsandnets.co.uk> +44 (0)1430 440757

© DelStar Technologies Limited 2015. Registered in England #00592411

[Terms Of Use](#) [Disclaimer](#) [Accessibility](#) [Cookie Policy](#)

