


19gsm polyethylene net with a thin lower melting bonding layer for heat lamination

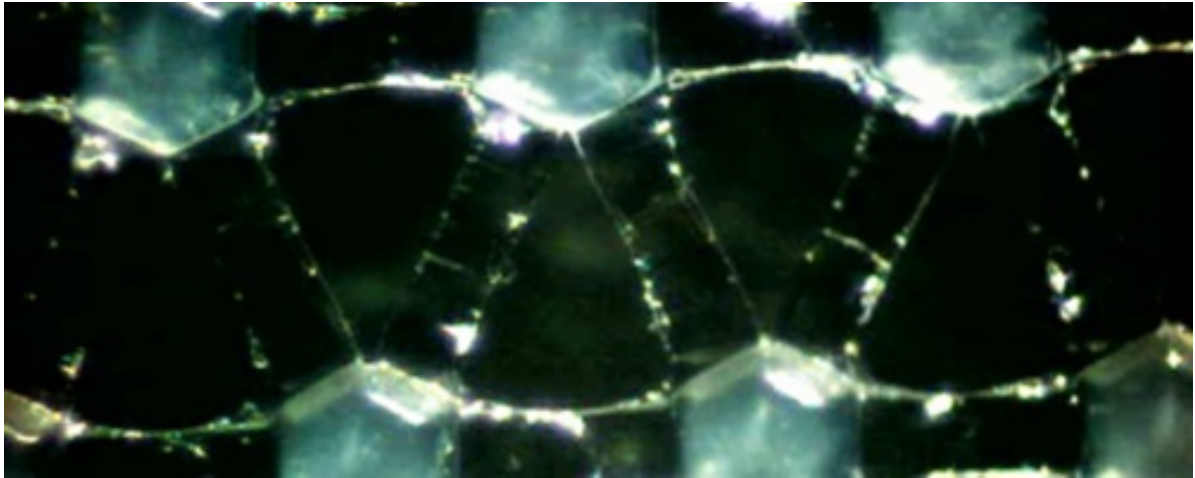

Description

- A polyethylene net with a thin lower melting bonding layer.

Processing

- Co-extruded nets are designed for use in heat lamination processes.

Applications

- Woundcare dressings requiring a laminated pad with low adherence characteristics.
- First aid dressings
- General lamination

Typical Properties

Property	Typical Value
Thickness (micron)	110
Film Weight (g/m ²)	19
Boss Count (MD) (per 25.4mm)	20
Boss Count (TD) (per 25.4mm)	35
Tensile Strength MD (gf/cm)	700
Tensile Strength TD (gf/cm)	500
Nominal Length (lm)	1500
Min Length (lm)	1000
Minimum Width (mm)	50
Maximum Width (mm)	1200

Product Information correct as of 27th April 2015

DelStar Technologies

Broad Lane Gilberdyke East Yorkshire HU15 2TD

<http://extrudedfilmsandnets.co.uk> +44 (0)1430 440757

© DelStar Technologies Limited 2015. Registered in England #00592411

[Terms Of Use](#) [Disclaimer](#) [Accessibility](#) [Cookie Policy](#)